



PRODUCT FEATURES

- Ultrafast Recovery Time
- Low Recovery Loss
- Soft Reverse Recovery Characteristics
- Low Leakage Current
- Low Forward Voltage
- High Surge Current Capability

APPLICATIONS

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS



DESCRIPTION

FRED from MacMic utilizes advanced processing techniques to achieve ultrafast recovery times and higher forward current. Its soft recovery characteristics and high reliability suit for wide industrial applications.

ABSOLUTE MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum D.C. Reverse Voltage		1200	V
V_{RRM}	Maximum Repetitive Reverse Voltage			
$I_{F(AV)}$	Average Forward Current	$T_C=85^\circ\text{C}$	60	A
$I_{F(RMS)}$	RMS Forward Current	$T_C=85^\circ\text{C}$	84	
I_{FSM}	Non Repetitive Surge Forward Current	$T_J=25^\circ\text{C}, t=10\text{ms}, 50\text{Hz}, \text{Sine}$	360	
P_D	Power Dissipation		375	W
T_J	Junction Temperature		-55 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-55 to +125	$^\circ\text{C}$
Torque	To Heat Sink	Recommended (M3)	1.1	Nm
R_{thJC}	Junction to Case Thermal Resistance		0.4	$^\circ\text{C}/\text{W}$
Weight			6	g

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = 1200\text{V}$			10	μA
		$V_R = 1200\text{V}, T_J = 125^\circ\text{C}$			500	
V_F	Forward Voltage	$I_F=60\text{A}$		2.8	3.5	V
		$I_F=120\text{A}$		3.4		
		$I_F=60\text{A}, T_J=125^\circ\text{C}$		2.1		
trr	Reverse Recovery Time	$(I_F = 1\text{A}, di_F/dt = -200\text{A}/\mu\text{s}, V_R = 30\text{V})$		30	45	ns
trr	Reverse Recovery Time	$(I_F = 0.5\text{A}, I_R=1\text{A}, I_{RR} = 0.25\text{A})$		55	75	ns

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse Recovery Time		320		ns
I_{RRM}	Maximum Reverse Recovery Current		5.6		A
Q_{RR}	Reverse Recovery Charge		600		nC
t_{rr}	Reverse Recovery Time		430		ns
I_{RRM}	Maximum Reverse Recovery Current		11		A
Q_{RR}	Reverse Recovery Charge		2000		nC
t_{rr}	Reverse Recovery Time		248		ns
I_{RRM}	Maximum Reverse Recovery Current		27.3		A
Q_{RR}	Reverse Recovery Charge		4000		nC

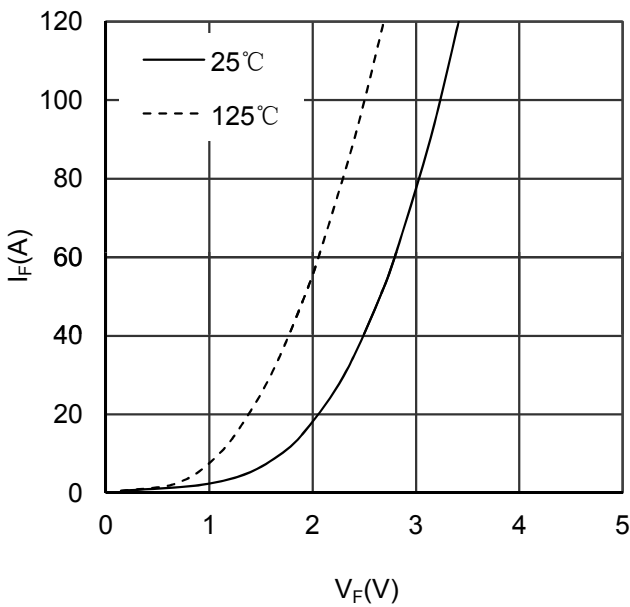


Figure 1. Forward Voltage Drop vs Forward Current

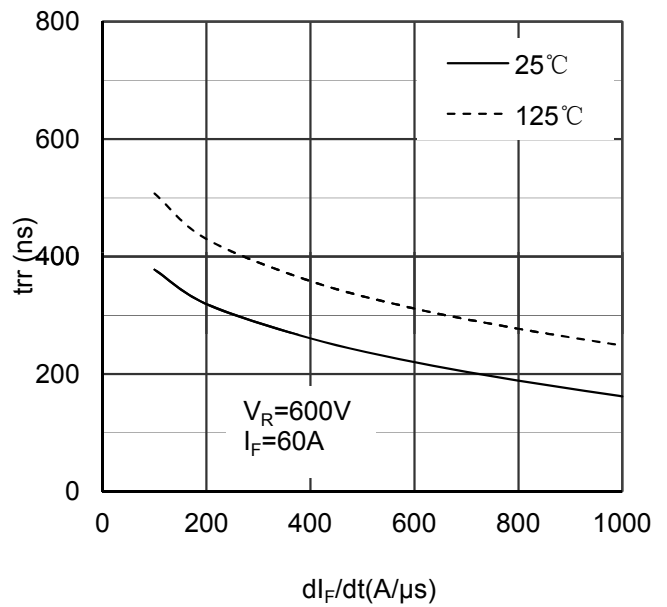


Figure 2. Reverse Recovery Time vs di_F/dt

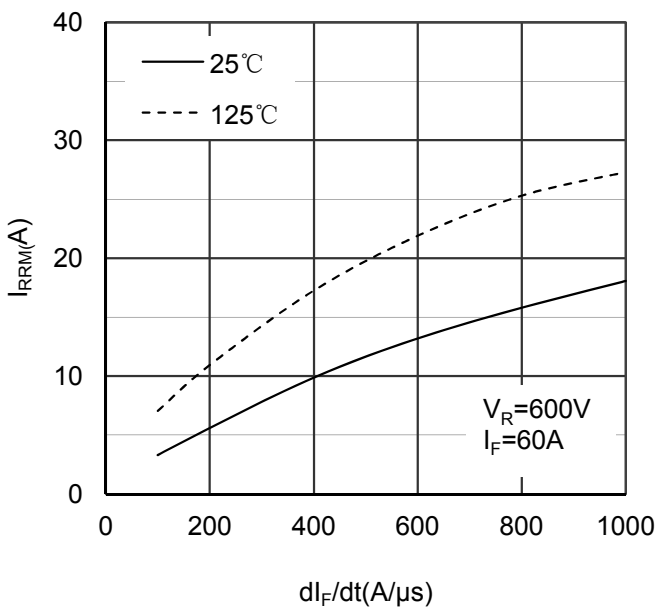


Figure 3. Reverse Recovery Current vs di_F/dt

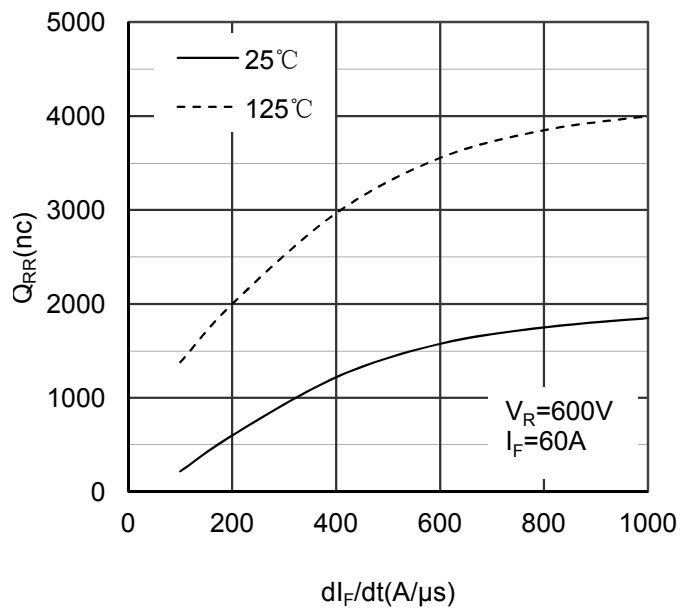


Figure 4. Reverse Recovery Charge vs di_F/dt

